



- System 052

1. Lift-up opening system actuated by longitudinal mechanics
2. Suitable for curved glass, “L” shaped (R20 angle 90°) or bonded glass thickness 6/8mm
3. Minimum overall dimensions in order to reduce the aluminum parts impact maximizing the products visibility
4. Gas-rams are installed inside the mechanics, a protection profile separates the gas-rams from the products
5. The base profile can be installed on the complete length of the counter using a complete bar giving the possibility to seat more mechanics and enforce the counter itself at the same time
6. NEM 052 system provides top security in open position and a high holding when closed
7. Ideal for pastry and no food, it finds high level applications also for deli, bakery and butcher’s shop


NEM USA
18 Bridge Street Unit 2A
Brooklyn, NY 11201 (USA)
info@nemusa-group.com
www.nemusa-group.com

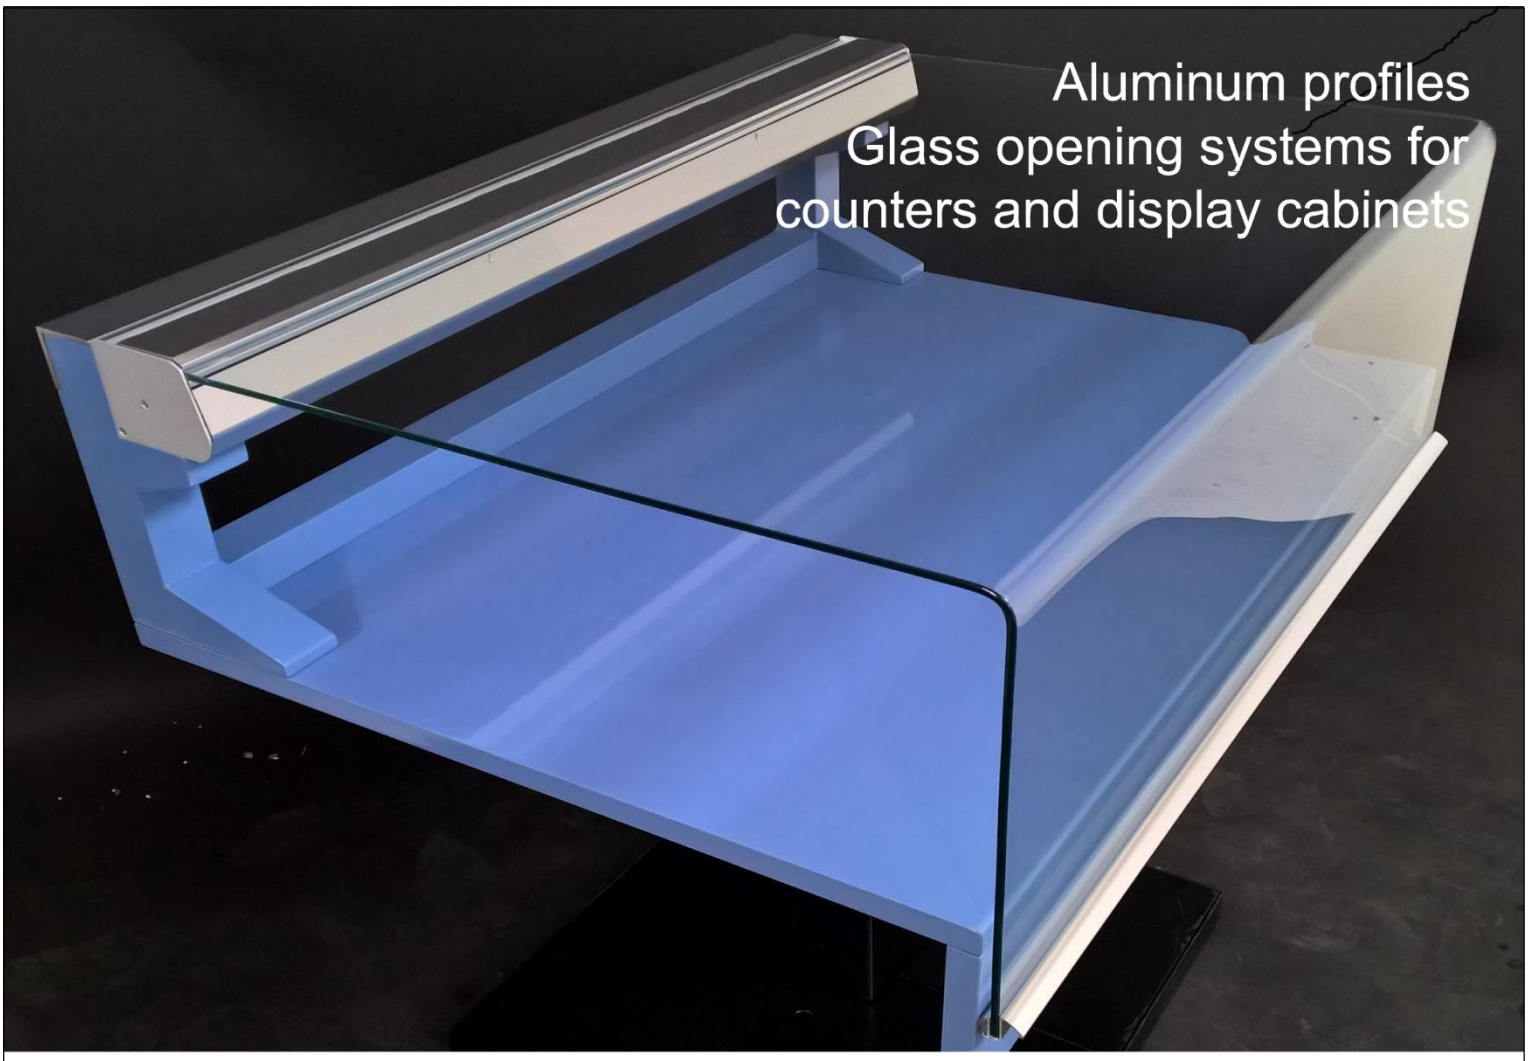

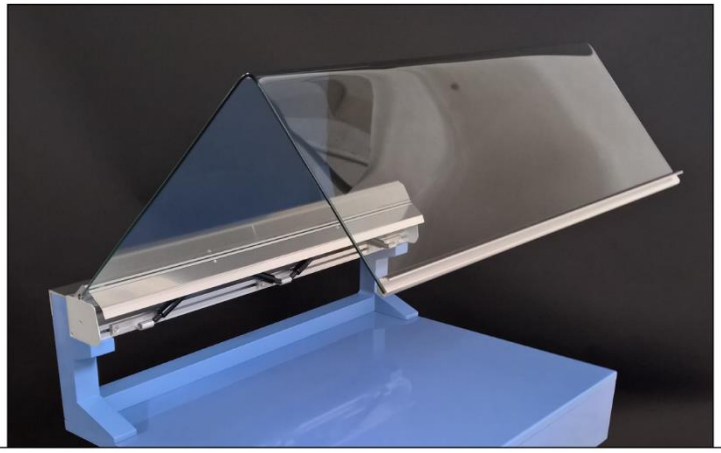


System 052


Radial lift up opening system for glass 6mm

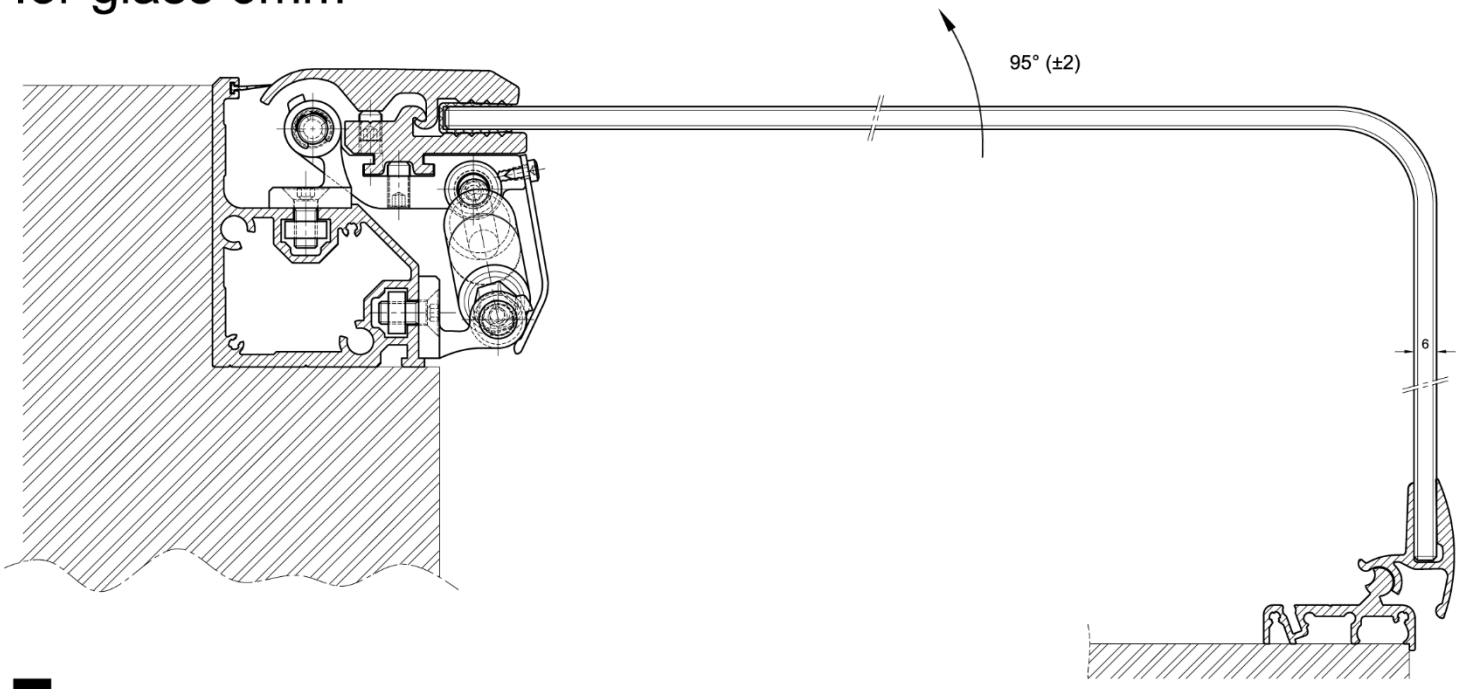


NEM 052 MAIN COMPONENTS

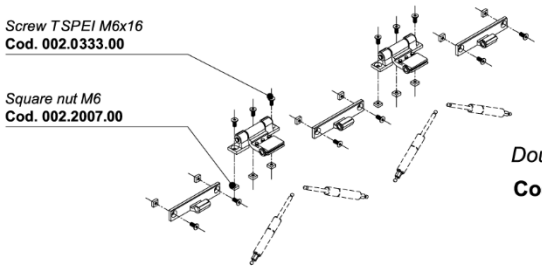


Double opening device
Cod. 052.3050



Gas spring
Mod. C. 46,5mm





Load bearing base profile L=8,6ft
Cod. 052.1200



Complete glass clamp profile L=8,6ft
Cod. 052.1500

APPLICATIONS

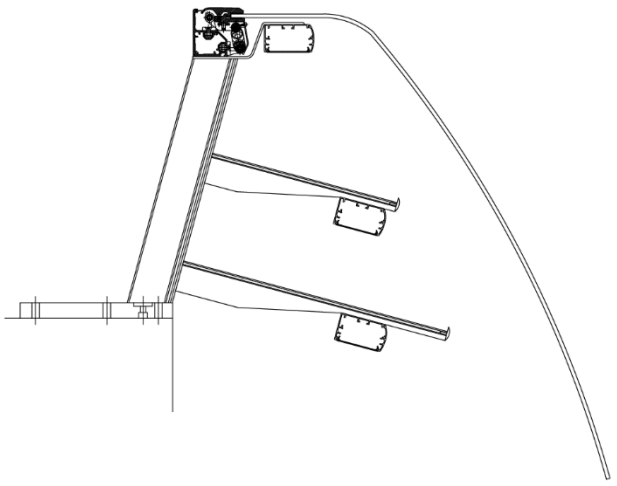

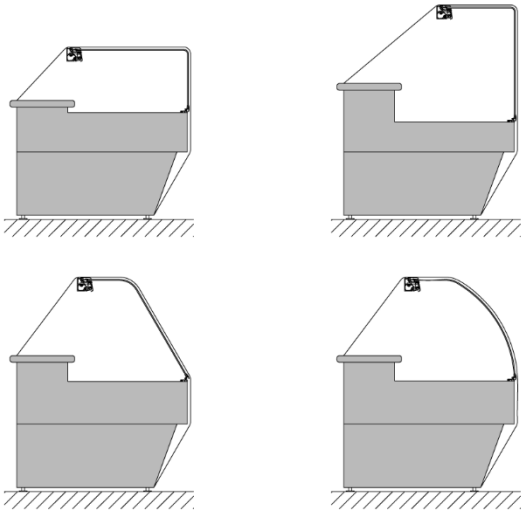

NEM USA
18 Bridge Street Unit 2A
Brooklyn, NY 11201 (USA)
info@nemusa-group.com

www.nemusa-group.com